



The new degree of comfort.™




Residential Electric  
Professional Classic Water Heaters

## Professional Classic™ electric water heaters are engineered for longer life – resisted heating elements and premium grade anode rod

### Efficiency

- Standby watts loss 62 - 97
- Isolated tank design reduces conductive heat loss
- Resisted copper upper element and resisted Lifeguard™ stainless steel lower element to prolong anode rod and tank life



### Performance

- FHR: 42 - 99 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise\*\*

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature


### Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty\*

\*See Residential Warranty Certificate for complete information

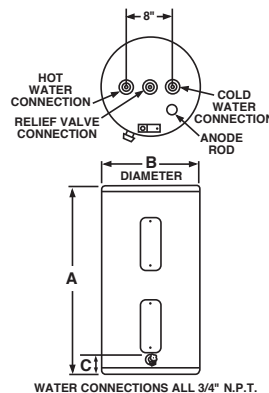

### Professional Classic

30 to 60-Imperial Gallon Capacities  
120 and 240 Volt AC/Single Phase Double and Single Element Models Electric



DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS					
MODEL NUMBER	STORAGE CAP.		ELEM. QTY.	120 VOLT		HEATING ELEMENTS		240 VOLT		HEIGHT (IN.) A	OUTSIDE DIAMETER (IN) B	HEIGHT TO DRAIN VALVE (IN) C	ESTIMATED SHIP. WEIGHT		STANDBY WATTS LOSS
	IMP. GALS.	LITRES		WATT.	AMPS.	208 VOLT WATT.	AMPS.	WATT.	AMPS.				LBS.	KG	
<b>TOP INLET</b>															
PROE30 S2 CN62	30	135	2	1500	12.5	2250	10.8	3000	12.5	46-1/2	19-3/4	3-1/2	105	48	62
PROE40 M2 CN66	37.5	170	2	1500	12.5	2250	10.8	3000	12.5	46	21-3/4	3-1/2	117	53	66
PROE40 M2 CN61†	37.5	170	2	N/A	N/A	N/A	N/A	3000	12.5	46	21-3/4	3-1/2	117	53	61
PROE40 M2 CN61†	37.5	170	2	N/A	N/A	N/A	N/A	3800	18.8	46	21-3/4	3-1/2	117	53	61
PROE60 T2 CN87	60	270	2	N/A	N/A	3380	16.3	4500	18.8	59	23	3-1/2	177	80	87
PROE60 T2 CN80†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	59.55	23-3/4	3-1/2	176	80	80
<b>SIDE INLET</b>															
PROE30 S2 CN64†	30	135	2	1500	12.5	N/A	N/A	3000	12.5	46-1/2	19-3/4	3-1/2	105	48	64
PROE60 T2 CN97†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	23	3-1/2	174	79	97

- Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements.
- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- All models equipped with heat traps.
- † Complies with ON/BC energy efficiency requirements. ON/BC 40 imperial gallon top inlet models will have side T&P.

\*\*Recovery = wattage/2.42 x temp. rise °F.  
Example: 4500W = 21 GPH  
2.42 x 90°

\*\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT